




# Specifications

## PVE 200M

### Vibro Hammer

USA

Dimensions in inches

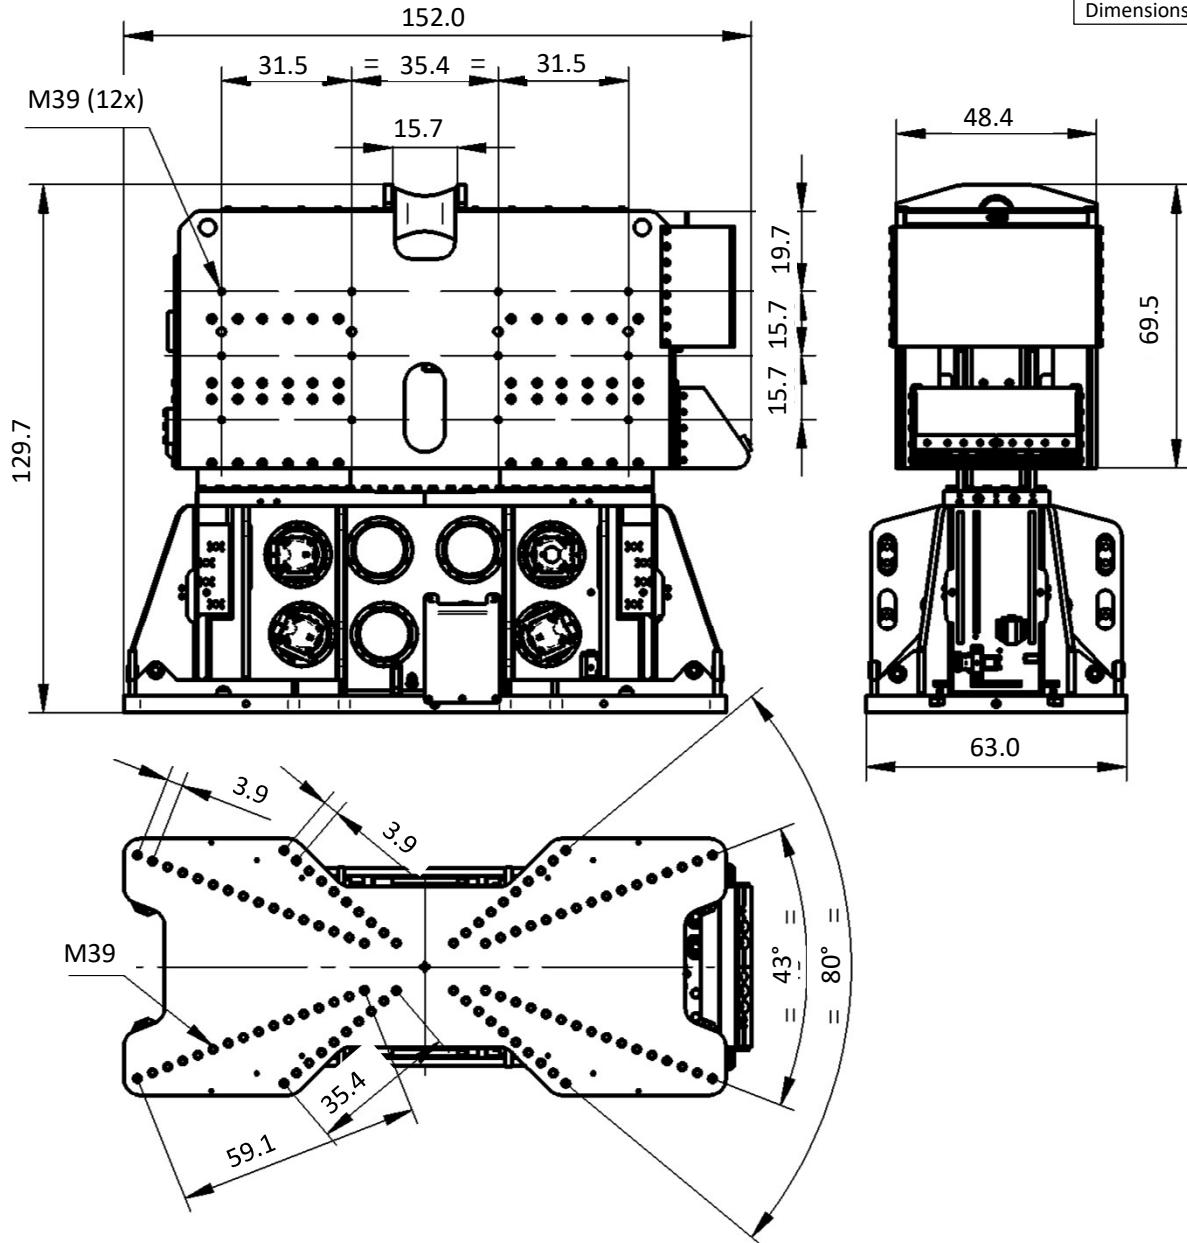

### Specifications

### PVE 200M

Eccentric moment	17,361 in-lbs	<b>Clamps:</b>	
Max. centrifugal force	483 ton	Double clamps	150TC (4x)
Max. frequency	1,400 rpm	Transport weight per piece	2,866 lbs
Max. amplitude excluding 150TC (4x)	0.75 in		
Max. amplitude including 150TC (4x)	0.6 in		
Max. static line-pull	184 ton		
Max. operating pressure	5,076 psi	<b>Powerpack:</b>	
Max. oil flow	444 gal/min	Model	1600 series
Forced lubrication	yes		
Dynamic weight excluding 150TC (4x)	46,297 lbs	<b>Hose set:</b>	
Dynamic weight including 150TC (4x)	57,761 lbs	Length	197 ft
Total weight excluding 150TC (4x) & hoses	63,934 lbs	Transport weight (±)	6,724 lbs