




Specifications

PVE 23VML

Vibro Hammer

Dimensions in inches

USA

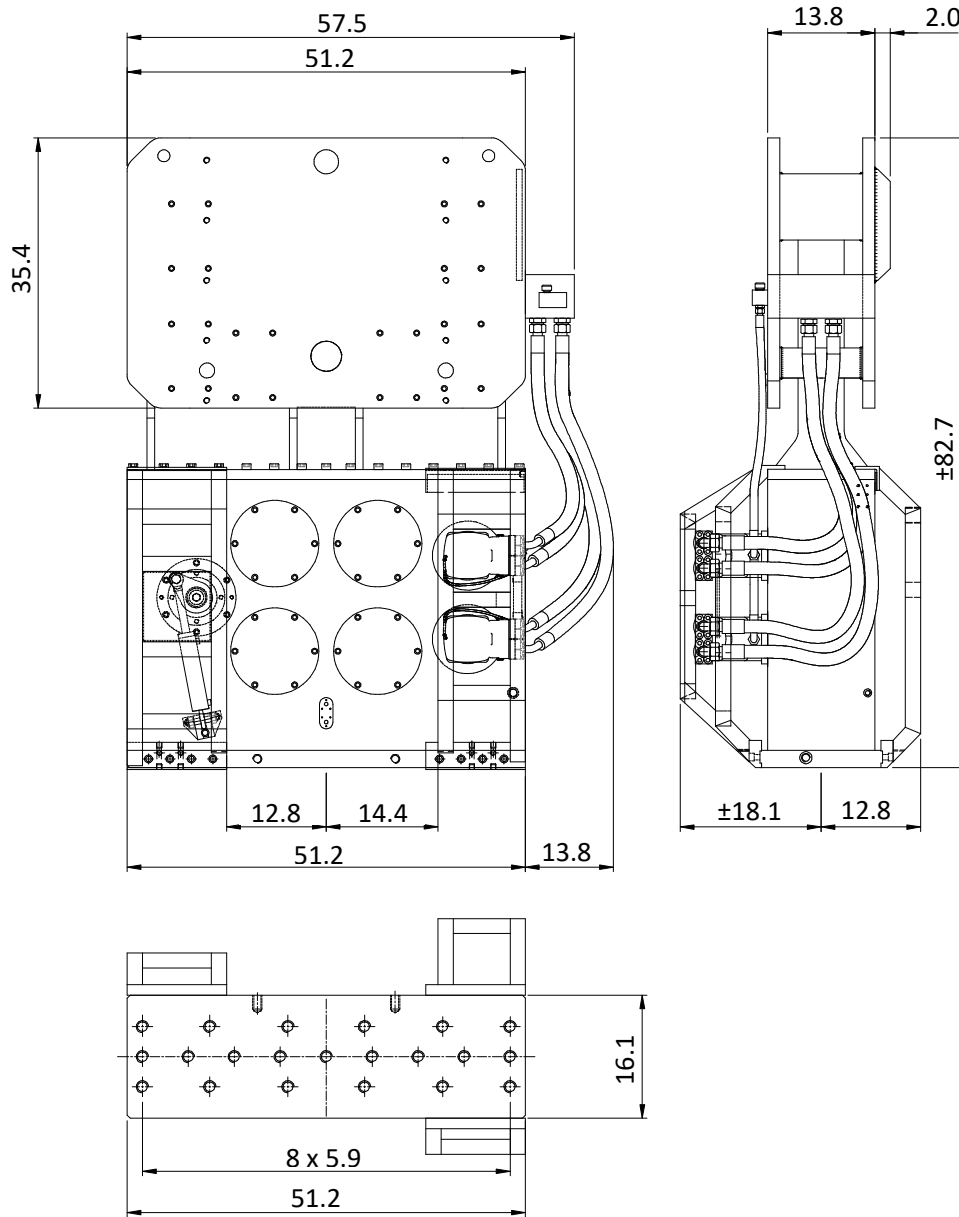

Specifications

PVE 23VML

Eccentric moment	0-1,997 in-lbs	Clamps:	
Max. centrifugal force	0-159 ton	Sheet pile clamp	150TU
Max. frequency	2,300 rpm	Transport weight per piece	2,800 lbs
Max. amplitude excluding 150TU	0.67 in	Double clamps	80TC
Max. amplitude including 150TU	0.46 in	Transport weight per piece	1,102 lbs
Max. static line-pull	31 ton		
Max. operating pressure	5,076 psi	Powerpack:	
Max. oil flow	143 gal/min	Model	N/A
Forced lubrication	yes		
Dynamic weight excluding 150TU	5,952 lbs	Hose set:	
Dynamic weight including 150TU	8,752 lbs	Length	N/A ft
Total weight excluding 150TU & hoses	7,937 lbs	Transport weight (±)	N/A lbs