




Specifications

PVE 500M

Vibro Hammer

Dimensions in inches

USA

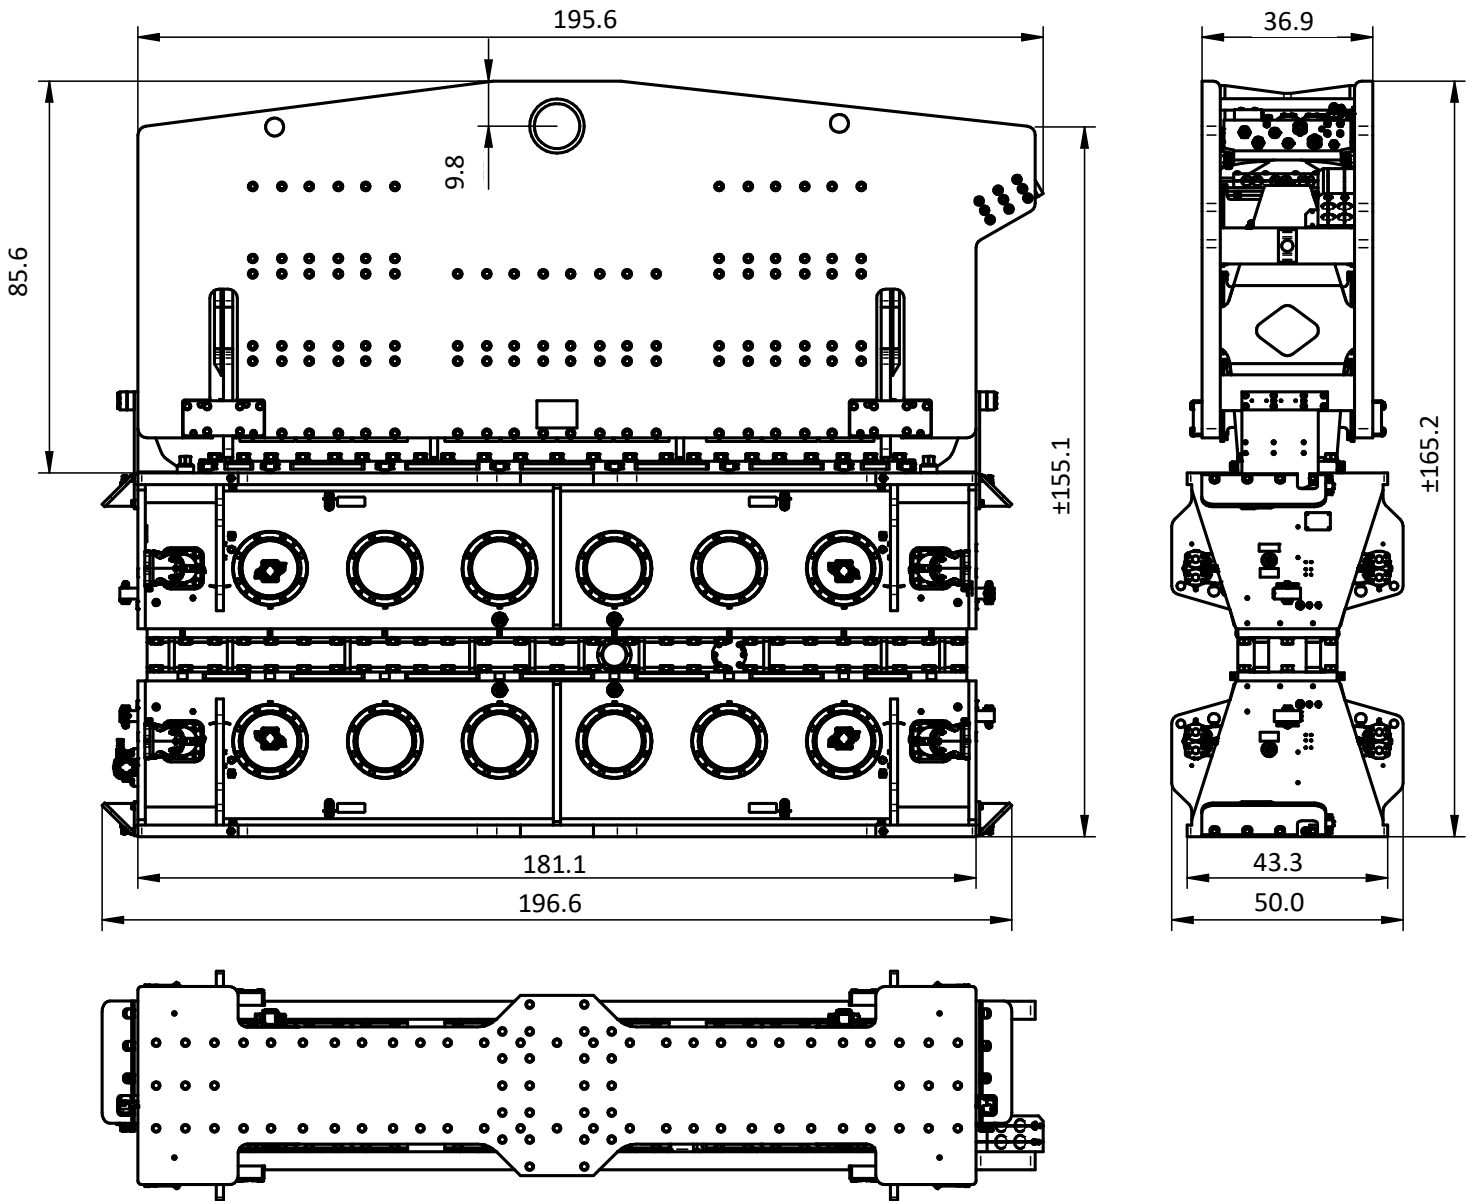

Specifications

PVE 500M

Eccentric moment	43,403 in-lbs	Clamps:	
Max. centrifugal force	1,208 ton	Double clamps	350TC (4x)
Max. frequency	1,400 rpm	Transport weight per piece	6,570 lbs
Max. amplitude excluding 350TC (4x)	1.14 in		
Max. amplitude including 350TC (4x)	0.71 in		
Max. static line-pull	371 ton		
Max. operating pressure	5,076 psi	Powerpack:	
Max. oil flow	845 gal/min	Model	3200 series
Forced lubrication	yes		
Dynamic weight excluding 350TC (4x)	76,059 lbs	Hose set:	
Dynamic weight including 350TC (4x)	124,870 lbs	Length	197 ft
Total weight excluding 350TC (4x) & hoses	109,129 lbs	Transport weight (±)	11,684 lbs