




# Specifications

## PVE 55M

### Vibro Hammer

USA

Dimensions in inches

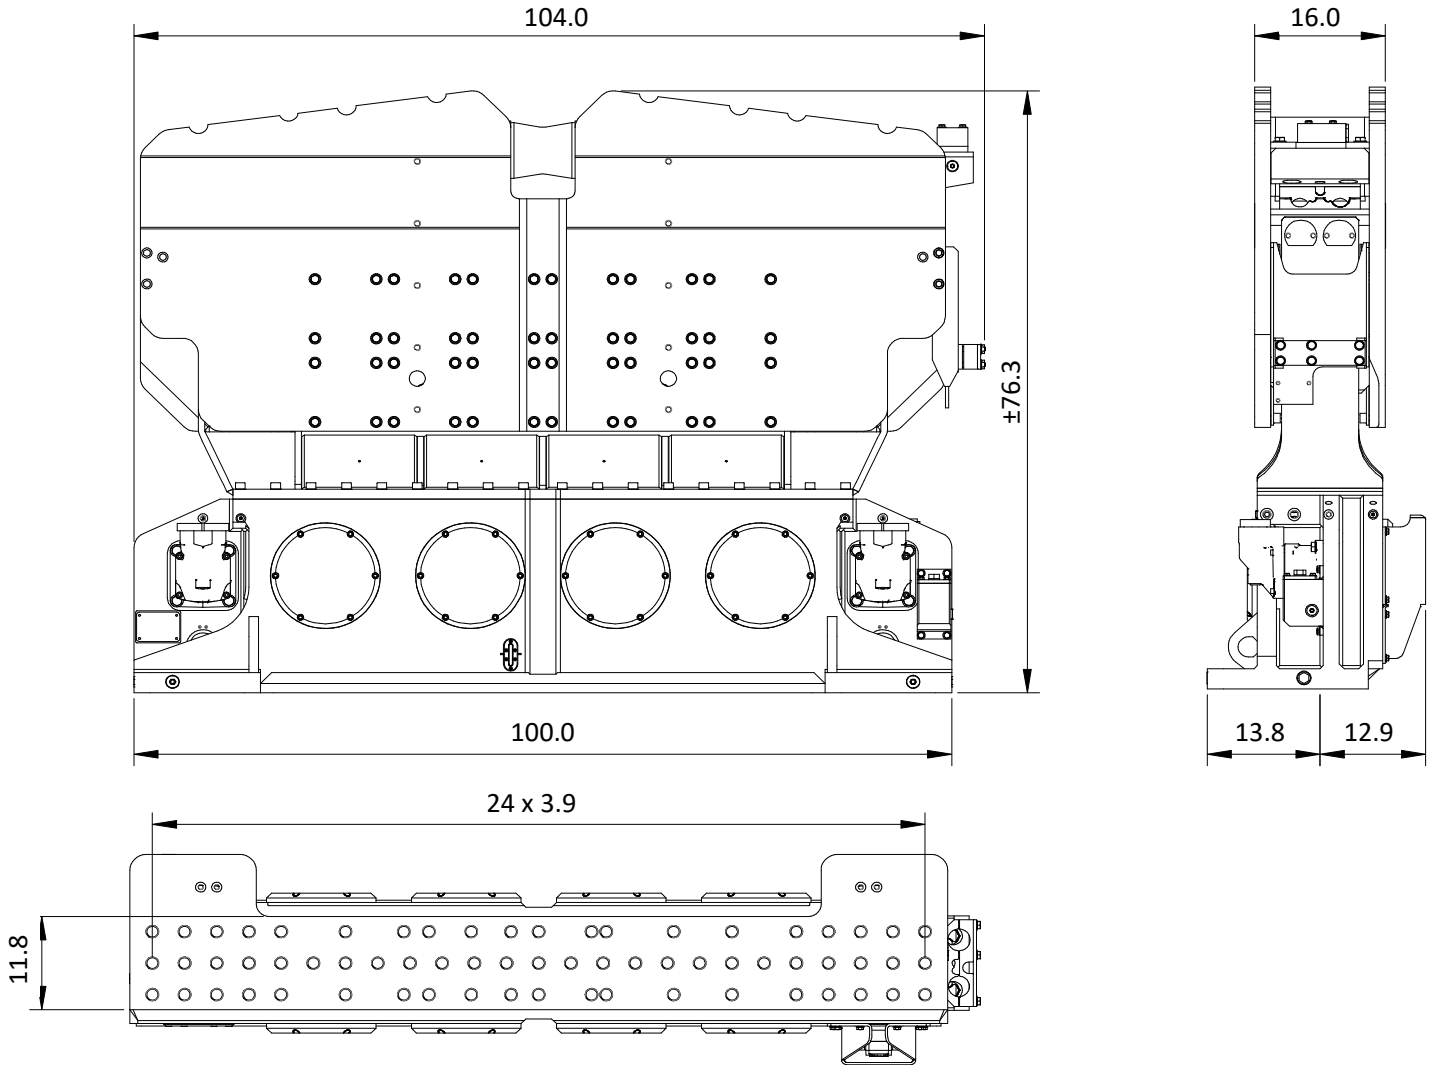

### Specifications

### PVE 55M

Eccentric moment	4,688 in-lbs	<b>Clamps:</b>	
Max. centrifugal force	192 ton	Sheet pile clamp	200TU
Max. frequency	1,700 rpm	Transport weight per piece	2,866 lbs
Max. amplitude excluding 200TU	1.19 in	Double clamps	100TC
Max. amplitude including 200TU	0.87 in	Transport weight per piece	1,521 lbs
Max. static line-pull	82 ton		
Max. operating pressure	5,076 psi	<b>Powerpack:</b>	
Max. oil flow	163 gal/min	Model	600 series
Forced lubrication	yes		
Dynamic weight excluding 200TU	7,893 lbs	<b>Hose set:</b>	
Dynamic weight including 200TU	10,759 lbs	Length	148 ft
Total weight excluding 200TU & hoses	12,566 lbs	Transport weight (±)	2,425 lbs