




Specifications

PVE 70VM

Vibro Hammer

USA

Dimensions in inches

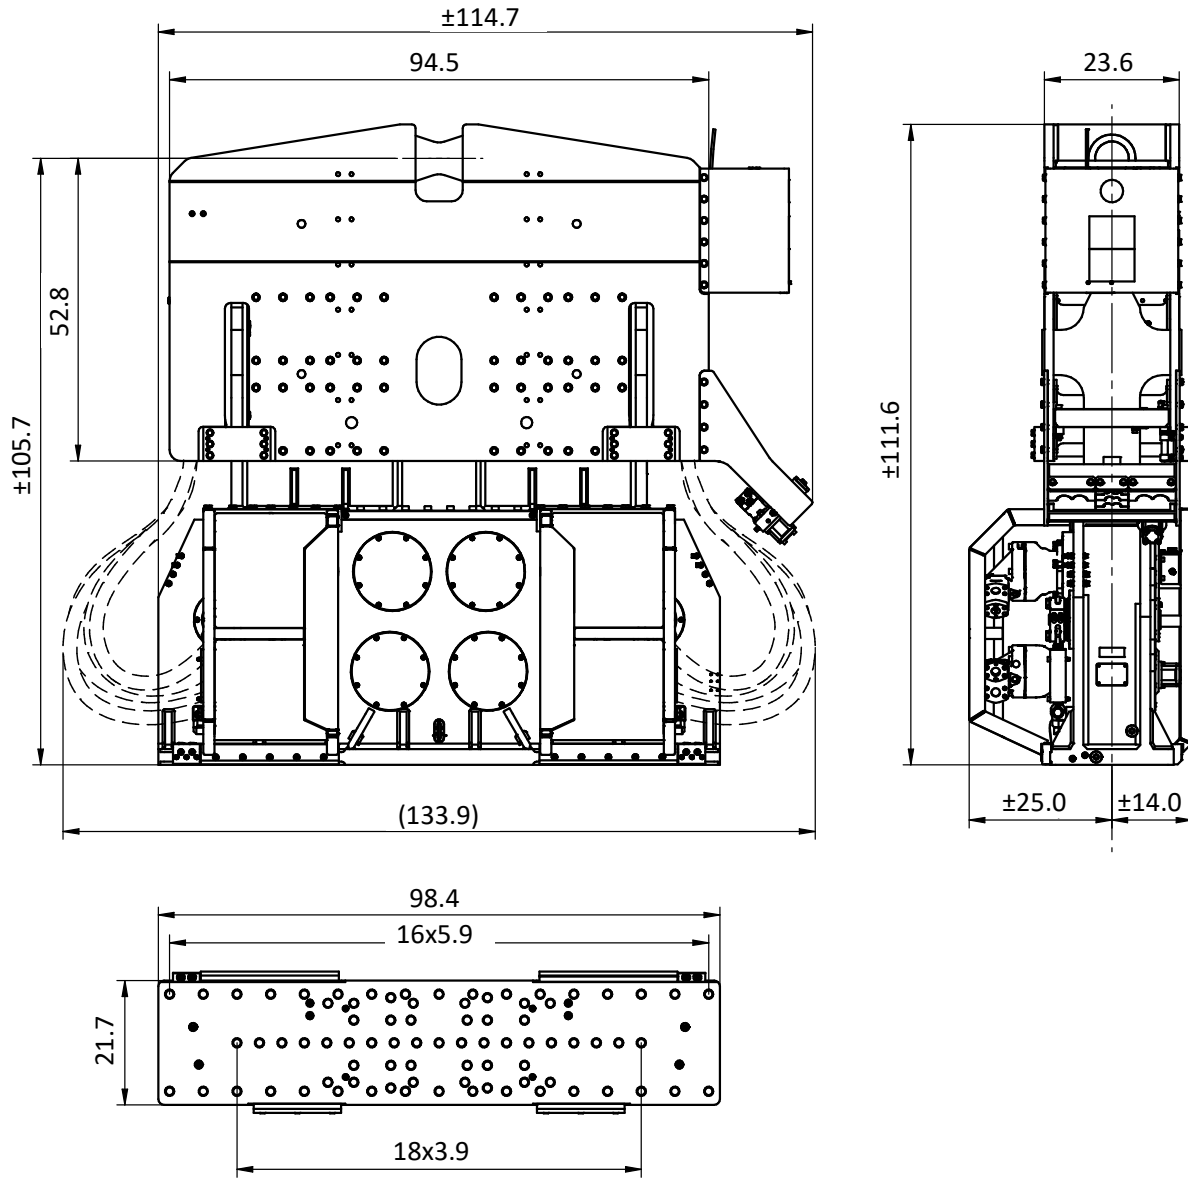

Specifications

PVE 70VM

Eccentric moment	0-6,076 in-lbs	Clamps:	
Max. centrifugal force	0-345 ton	Sheet pile clamp	350TU
Max. frequency	2,000 rpm	Transport weight per piece	5,732 lbs
Max. amplitude excluding 350TU	0.83 in	Double clamps	175TC
Max. amplitude including 350TU	0.59 in	Transport weight per piece	2,866 lbs
Max. static line-pull	82 ton		
Max. operating pressure	5,076 psi	Powerpack:	
Max. oil flow	417 gal/min	Model	1600 series
Forced lubrication	yes		
Dynamic weight excluding 350TU	14,991 lbs	Hose set:	
Dynamic weight including 350TU	20,723 lbs	Length	148 ft
Total weight excluding 350TU & hoses	22,619 lbs	Transport weight (±)	4,343 lbs