




Specifications

PVE 15VM

Vibro Hammer

USA

Dimensions in inches

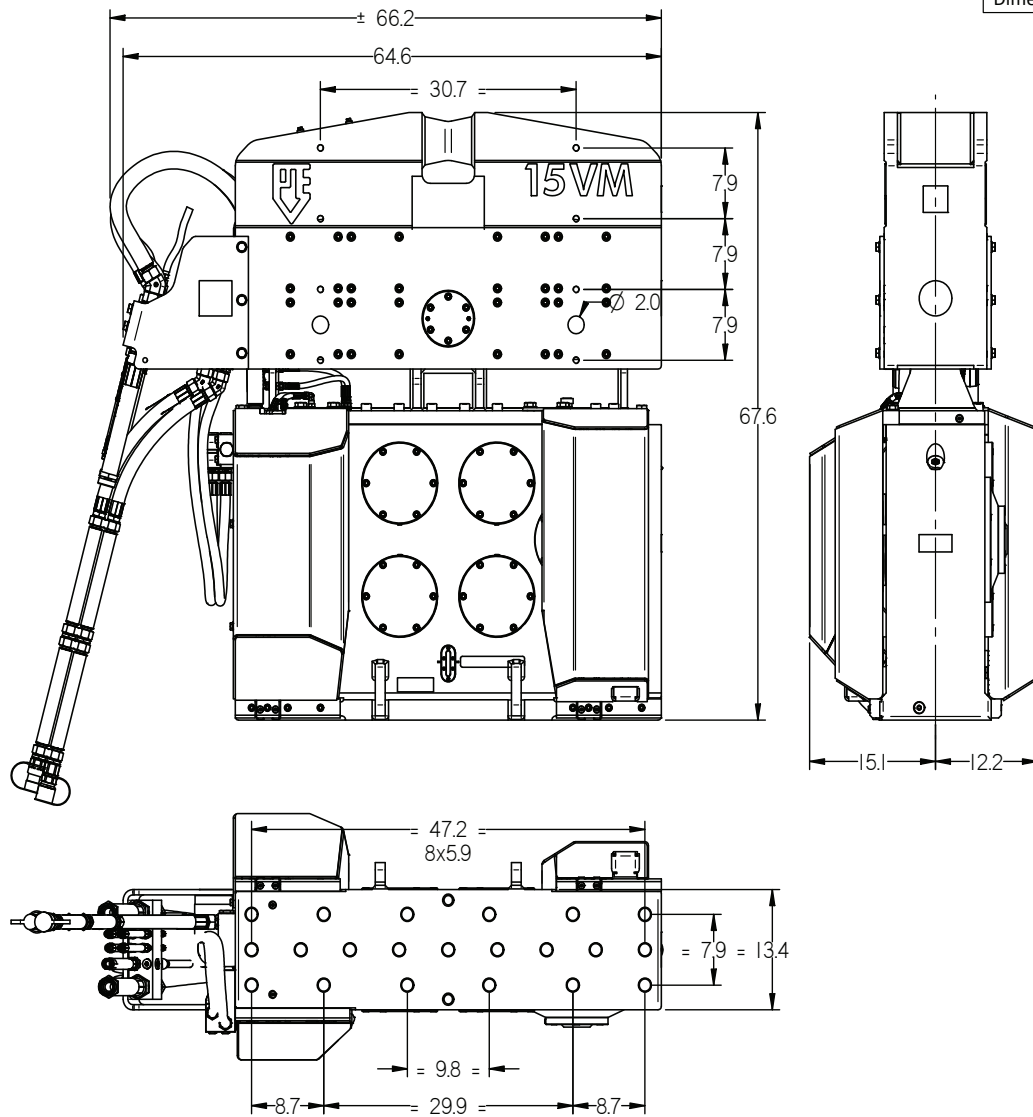

Specifications		PVE 15VM	
Eccentric moment	0-1276 in-lbs	Clamps:	
Max. centrifugal force	0-98 ton	Sheet pile clamp	110TU
Max. frequency	2,300 rpm	Transport weight per piece	1,653 lbs
Max. amplitude excluding 110TU	0.5 in	Double clamps	55TC
Max. amplitude including 110TU	0.38 in	Transport weight per piece	683 lbs
Max. static line-pull	28 ton	Powerpack:	
Max. operating pressure	5,076 psi	Model	400 series
Max. oil flow	90 gal/min	Hose set:	
Forced lubrication	yes	Length	98 ft
Dynamic weight excluding 110TU	4,696 lbs	Transport weight (±)	1,356 lbs
Dynamic weight including 110TU	6,349 lbs		
Total weight excluding 110TU & hoses	6,393 lbs		