




Specifications

PVE 40VM

Vibro Hammer

USA

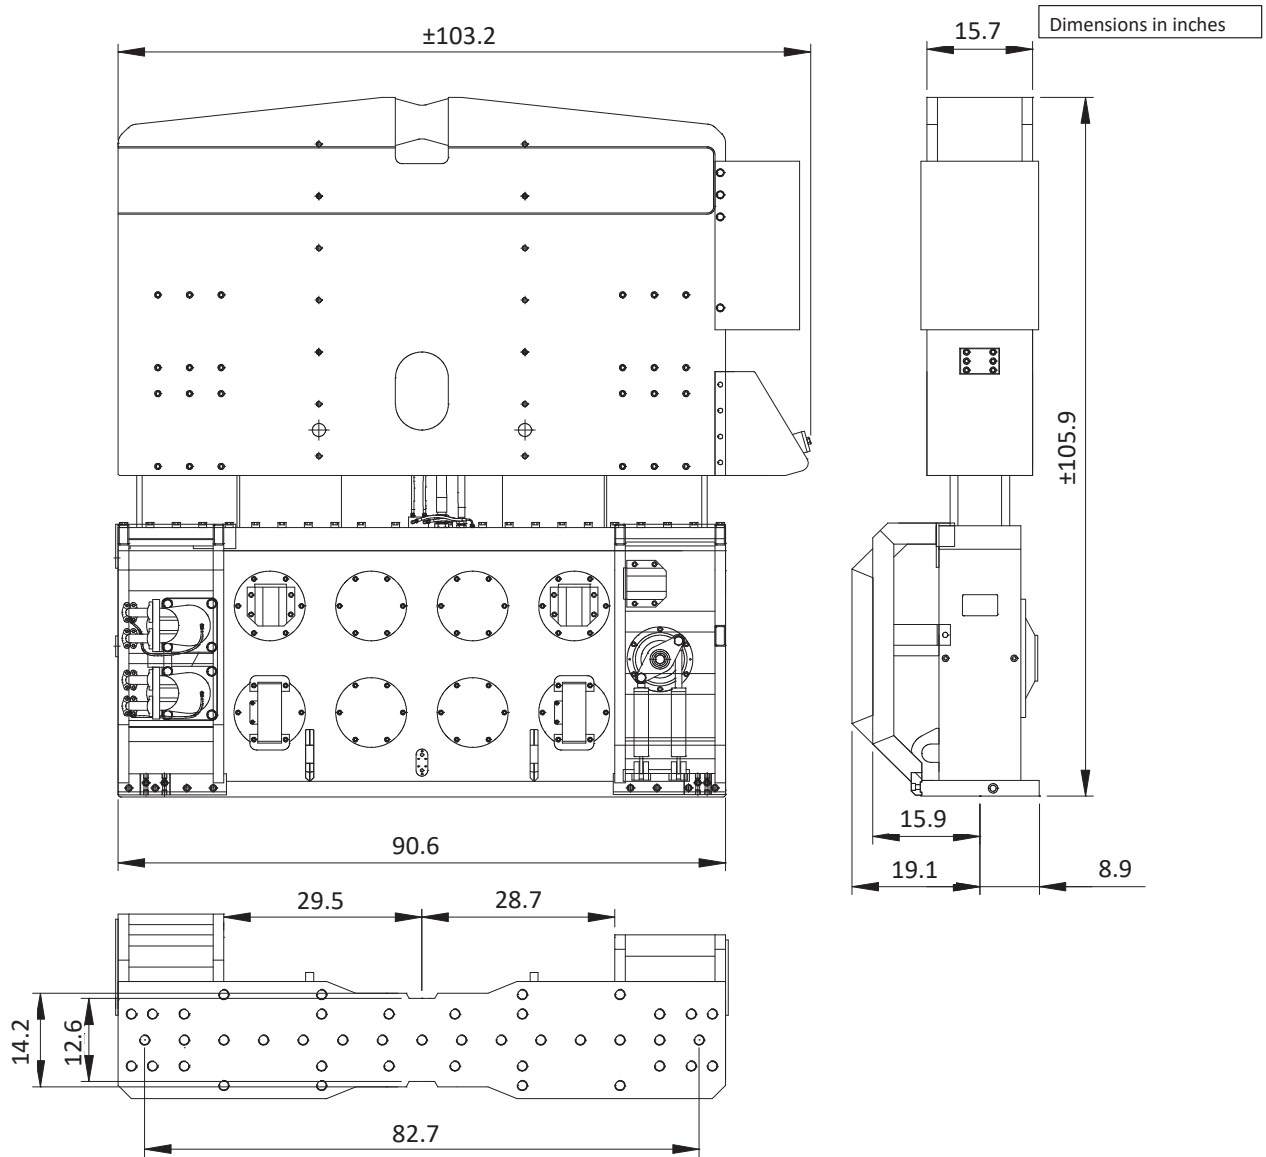

Specifications

PVE 40VM

Eccentric moment	0-3,472 in-lbs	Clamps:	
Max. centrifugal force	0-178 ton	Sheet pile clamp	200TU-P
Max. frequency	1900 rpm	Transport weight per piece	2,866 lbs
Max. amplitude excluding 200TU-P	0.75 in	Double clamps	125TC
Max. amplitude including 200TU-P	0.46 in	Transport weight per piece	1,984 lbs
Max. static line-pull	41 ton		
Max. operating pressure	5,076 psi	Powerpack:	
Max. oil flow	211 gal/min	Model	800 series
Forced lubrication	yes		
Dynamic weight excluding 200TU-P	9,480 lbs	Hose set:	
Dynamic weight including 200TU-P	12,346 lbs	Length	148 ft
Total weight excluding 200TU-P & hoses	14,903 lbs	Transport weight (\pm)	2,549 lbs